STANDARD PC RANGE

PC-F1A PRODUCT GUIDE

PC-F1A Self Tapping Female

The versatile self-tapping PC-F1A female clip is designed to be installed into a variety of substrates, and be combined with any of the male clips in the Standard Range. Male clips determine pull-out loads, which range from 2 - 33lb per clip set. Refer to Clip Layout Guides for recommended clip spacing.

PC-F1A

USE WITH:

PC-M2H





PC-DC1





PC-M1B

PC-VMX

PC-SM2H

PC-SVMX

PC-SM1AC



MATERIAL:

White Acetal copolymer

Installation Guide PC-F1A, PC-DC1 Clip Lavout Guide TD-02, 09, 12 Panel Offset Guide


BENEFITS

- · Self-aligning installation without adhesives
- Perfect panel alignment and secure mounting every time
- · Remove and refit panels in any sequence multiple times
- Saves time and reduces cost
- Option of 4.4lb, 11lb, 22lb, or 33lb pull out load per clip set
- Allows for flexing and expansion of panel and support frame

APPLICATIONS

- · Covered, painted and pre-finished panels
- · Ceiling and wall panels
- Exterior deckhead panels (marine only)
- · Refits and upgrades of existing installations
- Variety of substrates
- · Composites and thin-walled panels
- Fits into PC-DC1 for installation into drywall and concrete

INSTALLATION: Partially exploded through section showing typical installation method

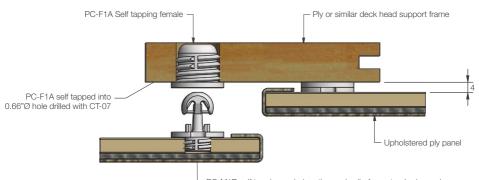

- PC-M1B self tapping male (or other male clip from standard range)

