STRATLOCK SL RANGE
SL-RCF90 INSTALLATION GUIDE

SL-RCF90 How to build a wall
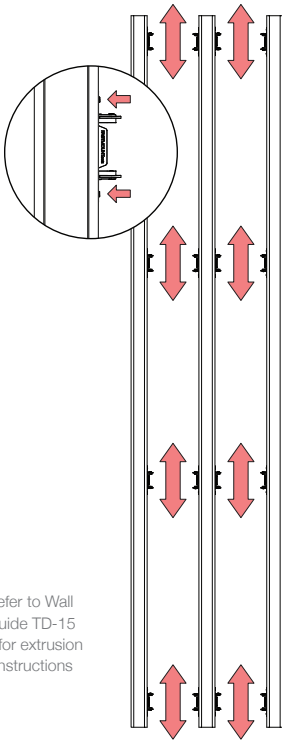
SL-RCF90

USE WITH:

SL-RLE

Grub screws (supplied)

Packers if required

Appropriate substrate fastener

0.1' hex key

Slide SL-RCF90 into groove of vertical SL-RLE and tighten grub screws with 0.1' hex key to secure.

Insert profile end of horizontal SL-RLE into SL-RCF90, tighten grub screws with 0.1' hex key to secure.

NOTE: Refer to Wall Layout Guide TD-15 & TD-16 for extrusion spacing instructions

FASTMOUNT